
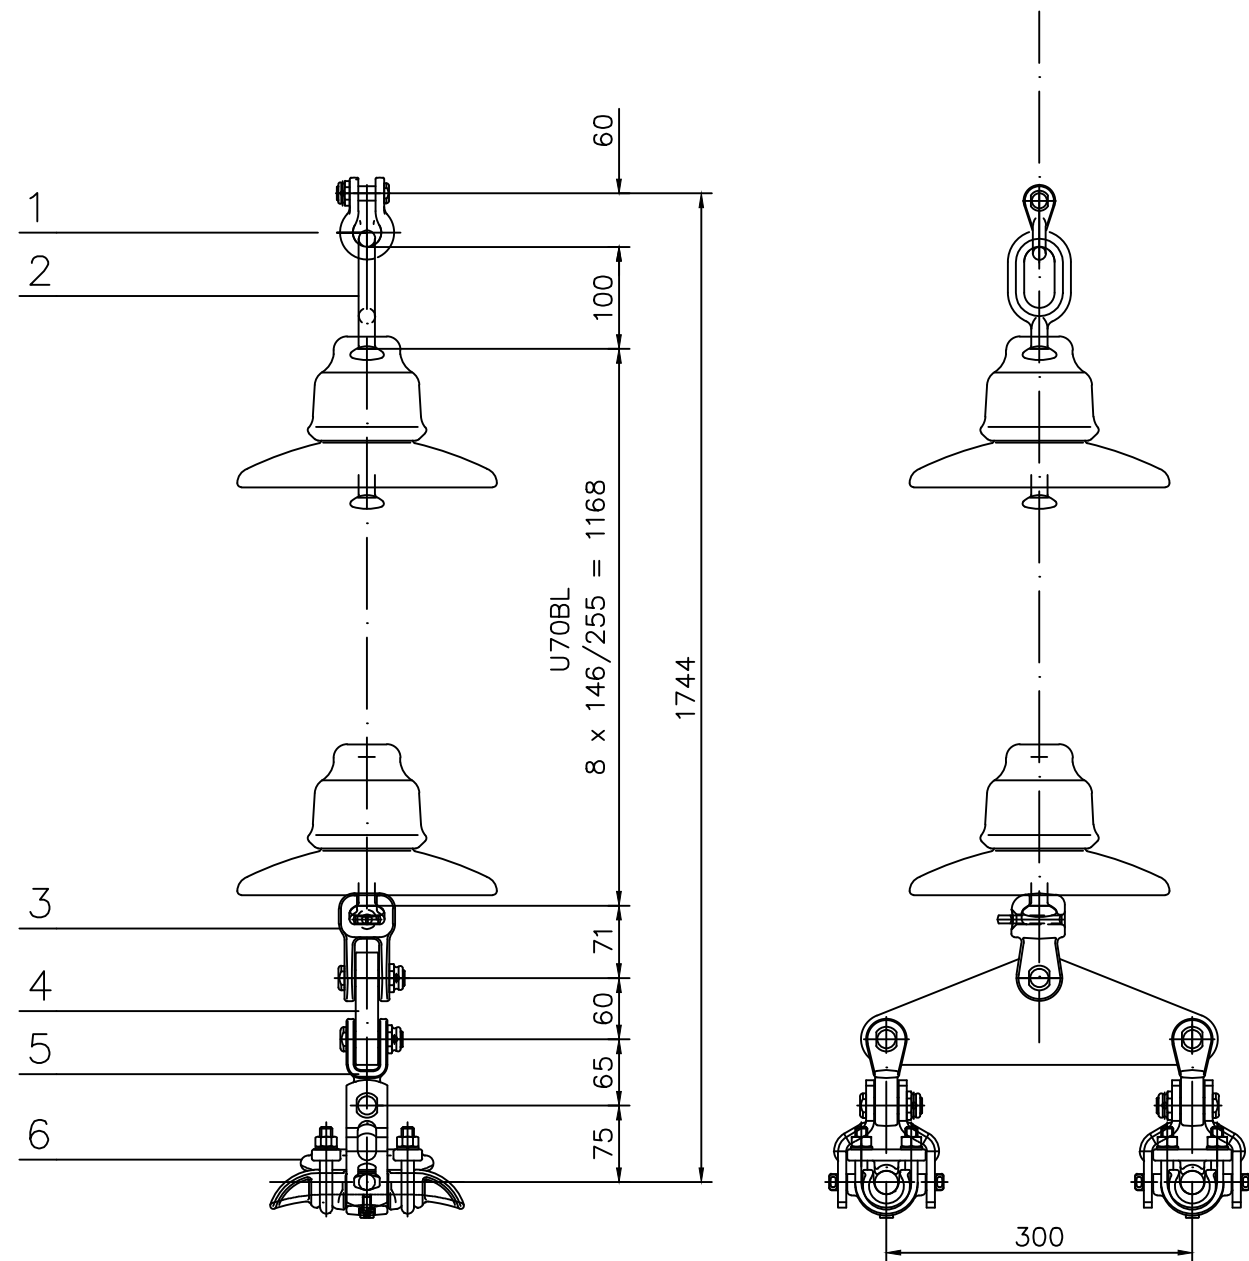




Minimum breaking strength (without suspension clamp) 120 kN
Line voltage 110 kV
Conductor 243-AL1/39-ST1A $\varnothing$ 21.80 mm , cross section 282.5 mm²
d. f. s. – drop forged steel
h. d. g. – hot dip galvanised
Standard coupling according to IEC 120/16

6	Suspension clamp	2	12.22.90D	al. alloy		
5	Clevis tongue	2	22.45.10D	d. f. s.	h. d. g.	
4	Yoke	1	43.29.33.80	steel	h. d. g.	
3	Socket clevis	1	24.60.10D	d. f. s.	h. d. g.	
2	Ball eye	1	21.25.10D	d. f. s.	h. d. g.	
1	Shackle	1	27.10.10D	d. f. s.	h. d. g.	
						
Objekt		330/110kV TARTU-SINDI ÕHULIINI EHITUS II ehitusetapp, Oiu - Viljandi			Projekteeris/Kuupäev H. Vihman 19.04.2012	
Joonise nimi		Liinitarvikud 110 kV kandekett nurga-kandemastile A(T)2G			Kontrollis/kuupäev J. Karin	
					Kooskõlastas	Leht
					Joonestas	Lehti
Mõõtkaava		Formaat	Joonise number	Muudatus	Staatus	
		A3	KPL1010-K2.2-06.3.4	TJ	Teostusjoonis	