

File

File : oiu_aj_19.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:36:18 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2912 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2912 Acq. time : 20s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

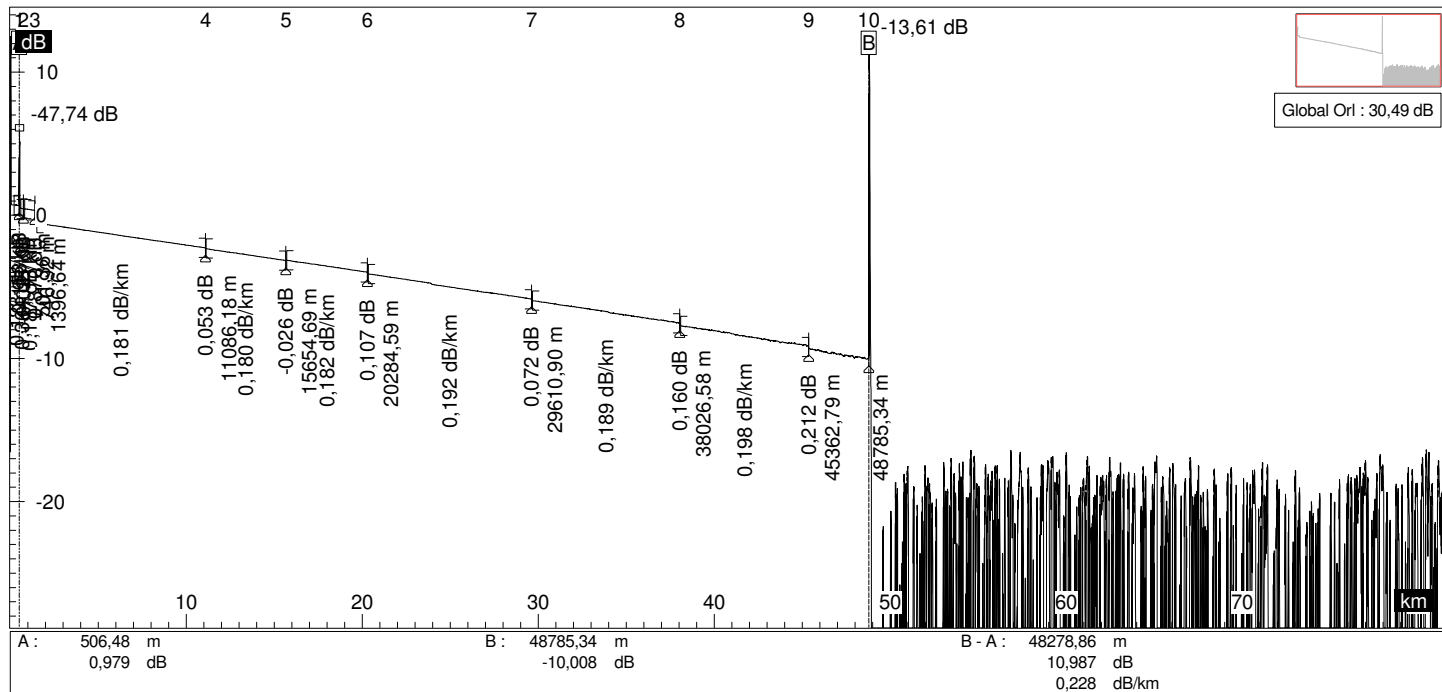

File

File : oiu aj_19.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:36:18 Module : 4126 LM Num. 2963

Table

	Event (10)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,153	-47,74	0,123	501,36			
2		746,92	-0,021		0,364	245,56			
3		1396,64	0,870		0,187	649,72	0,191	0,344	
4		11086,18	0,053		0,181	9689,54	1,751	2,965	
5		15654,69	-0,026		0,180	4568,51			
6		20284,59	0,107		0,182	4629,90	1,640	4,658	
7		29610,90	0,072		0,192	9326,31	1,789	6,554	
8		38026,58	0,160		0,189	8415,68	1,592	8,218	
9		45362,79	0,212		0,198	7336,22	1,449	9,828	Three points
10		48785,34		-13,61		3422,55	0,683	10,723	