

File

File : oiu aj_9.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:22:26 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2897 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2897 Acq. time : 15s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

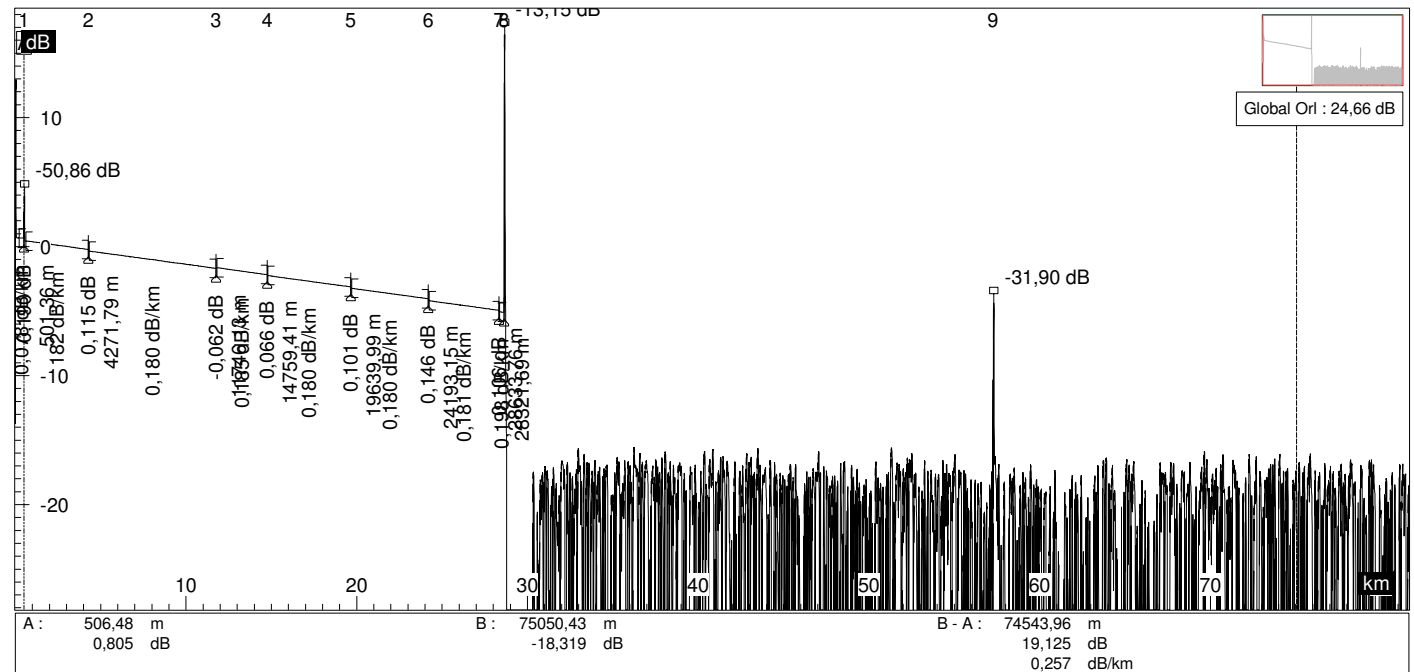

File

File : oiu aj_9.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:22:26 Module : 4126 LM Num. 2963

Table

Event (9)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1 	501,36	0,190	-50,86	0,078	501,36			
2 	4271,79	0,115		0,182	3770,43	0,686	0,876	
3 	11746,13	-0,062		0,180	7474,35	1,348	2,339	
4 	14759,41	0,066		0,185	3013,27	0,557	2,834	
5 	19639,99	0,101		0,180	4880,58	0,876	3,776	
6 	24193,15	0,146		0,180	4553,16	0,820	4,698	
7 	28321,69	0,106		0,181	4128,54	0,748	5,591	
8 	28633,76		-13,15	0,198	312,07	0,062	5,759	
9 	57262,41		-31,90		28628,65			