
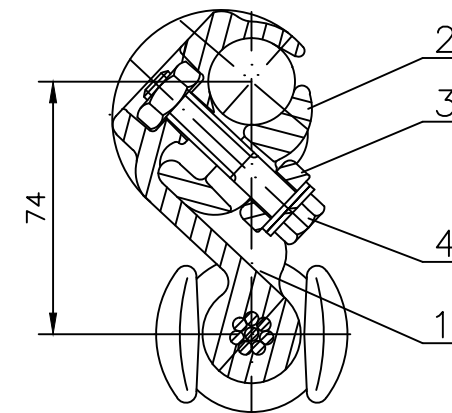


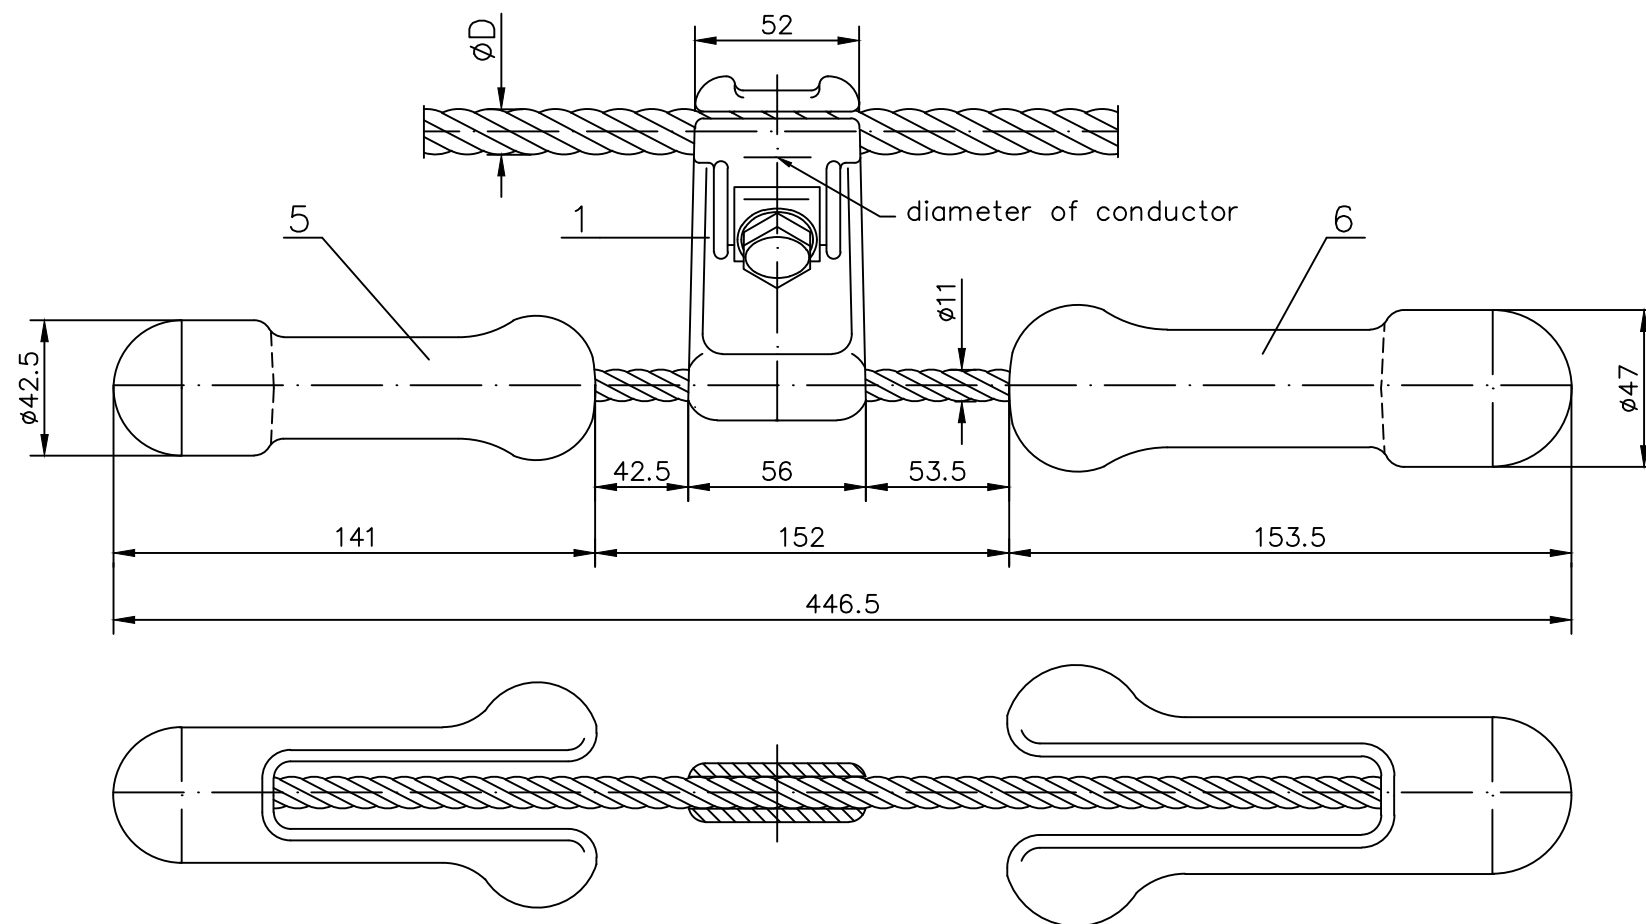

ØD = 12 – 19.6 mm

Minimum slipping strength : 2500 N

Tightening moment of bolts : M12, 53 Nm

Admissible deviation from nominal mass : ±3%

Manufacturer's trade mark, catalogue number and conductor diameter are marked on product.

Note:

al. alloy : acc. to EN (DIN 1725)

h. d. g. – hot dip galvanized : acc. to EN ISO 1461

Tolerances : ±0.7 mm up to and including 35 mm
±2% over 35 mm

6	Weight	1		Zn alloy	
5	Weight	1		Zn alloy	
4	Bolt M12 (compl.)	1		d.f.s./stain. steel	h.d.g./–
3	Special washer	1		al. alloy	
2	Fixing part	1		al. alloy	
1	Damper body	1		al. alloy	
Item	Description	Pcs.	Catalogue no.	Material :	Note
Mass : 2.35 kg		Date : 5.9.2006	Name	Signature	Substitute for :
		Design by :	M. Jukic		Catalogue number : 66.35.90
		Checked by :	R. Franic		
		Approved by :	M. Jukic		
Title : VIBRATION DAMPER for Al, Al. alloy or ACSR conductor Ø12 – Ø19.6 mm					Revision

Projekteeris/Kuupäev H. Vihman 27.11.2010		
Kontrollis/Kuupäev J. Karin	330/110kV TARTU-SINDI ÕHULINI EHTIS II ehitusetapp, Oü - Viljandi	
Koostöölased Leht	Limitarvikud	Leht
Joonestas	Juhtme 117-AL 1/68-ST1A vibrosummuti	Leht
Staatuse muutatus	Formaat Joonise number A3 KPL1010-K2.2-06.6.2	Teostusjoonis