

File

File : oiu aj_4.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:19:57 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2892 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2892 Acq. time : 15s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

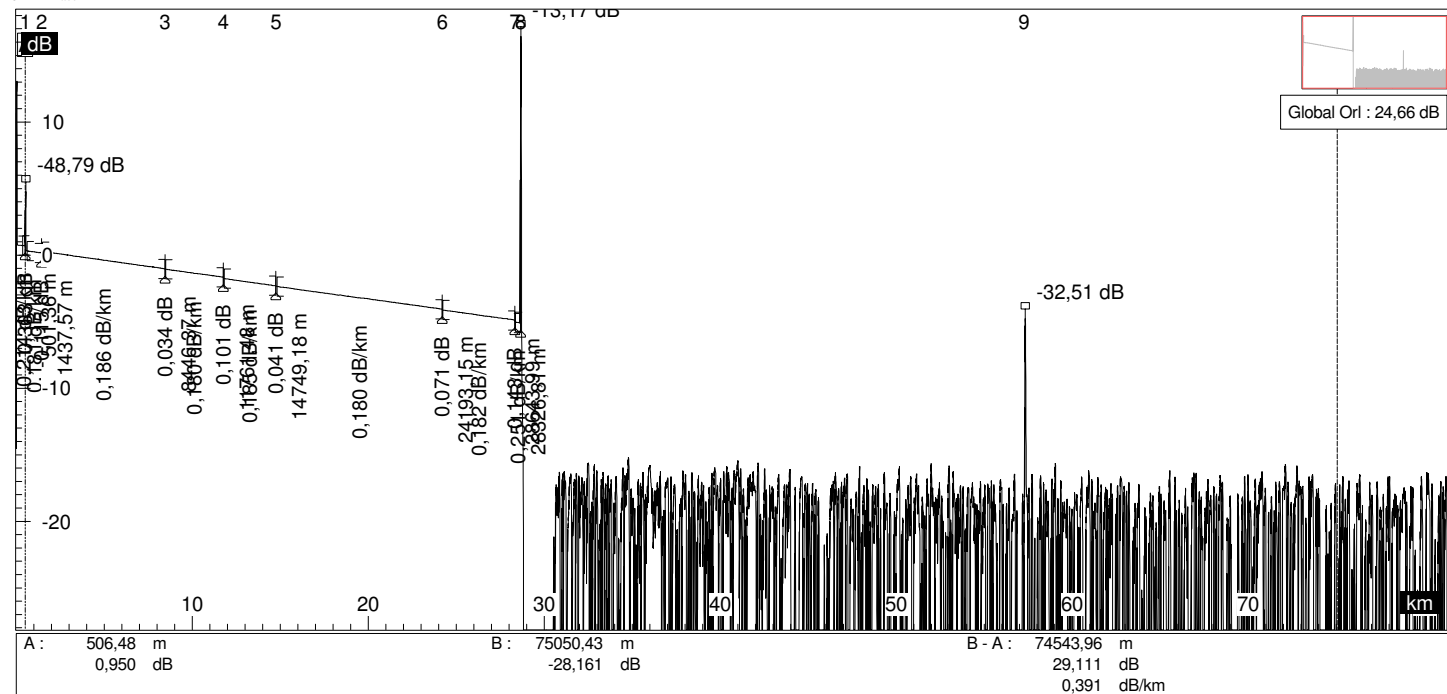

File

File : oiu aj_4.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:19:57 Module : 4126 LM Num. 2963

Table

	Event (9)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,363	-48,79	0,214	501,36			
2		1437,57	-0,115		0,181	936,21	0,169	0,532	
3		8446,37	0,034		0,186	7008,80			
4		11761,48	0,101		0,180	3315,11	1,934	2,352	
5		14749,18	0,041		0,185	2987,69			
6		24193,15	0,071		0,180	9443,97	2,294	4,748	
7		28326,81	0,143		0,182	4133,66	0,754	5,572	
8		28643,99		-13,17	0,251	317,19	0,079	5,794	
9		57247,06		-32,51		28603,07			