

ONE-SIDED EMERGENCY EXIT SIGNS

INFINITY B

MATERIALS:

White, grey or black polycarbonate body
Plexi glass

MOUNTING:

Recessed (wall)
Surface (wall)

POWER SUPPLY:

Self contained – 220÷240VAC/50÷60Hz
Central battery – 220÷240VAC/50÷60Hz; 216VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

3,2W LED

CHARGING:

Maximum 12h; energy-saving electronic impulse charger

AUTONOMY AND BATTERIES:

1h, 2h, 3h, Ni-MH batteries

INSULATION CLASS:

II

IP RATING:

IP44

VIEWING DISTANCE:

30m

AMBIENT TEMPERATURE:



t_a: 0°C÷40°C

OPTIONS:

SE – non maintained
SA – maintained
PT – manual test button
AT – autotest
RS – Rubic central monitoring
FZLV – central battery FZLV 24V
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charge
Deep discharge protection
III class of insulation of FZLV version

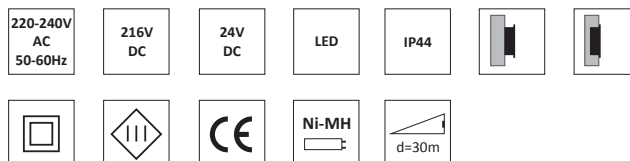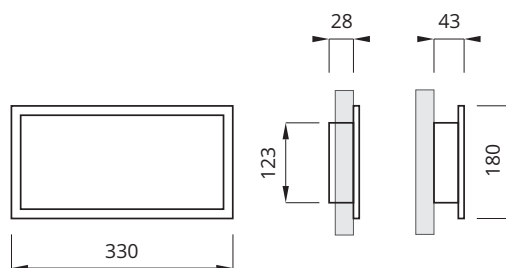

*see pictogram

SELF CONTAINED CONFIGURATION

CODE	POWER [W]	AUTONOMY [h]	MODE	OPTION	COLOR
IFB	3,2	1 2 3	SE SA	PT AT RS	WH GR BL

CENTRAL BATTERY CONFIGURATION

CODE	POWER [W]	SYSTEM	OPTION	COLOR
IFB	3,2	CB	CBS ADS ADL	WH GR BL

FZLV SYSTEM CONFIGURATION

CODE	POWER [W]	SYSTEM	COLOR
IFB	3,2	FZLV	WH GR BL

Legend:

SE – non maintained
SA – maintained
PT – manual test button
AT – autotest
RS – Rubic central monitoring
FZLV – fixture for central battery FZLV 24 VDC
CB – central battery
CBS – central battery (circuit monitoring)
ADS – central battery with address module ADS 20
ADL – central battery with address module ADL
IFB – fixture Infinity B
WH – fixture in white color
GR – fixture in grey color
BL – fixture in black color

*Emergency exit sign fixtures do not include any pictogram in the set. Pictograms have to be chosen and ordered as a separate item.