

File

File : oiu aj_10.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:22:56 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2898 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2898 Acq. time : 15s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

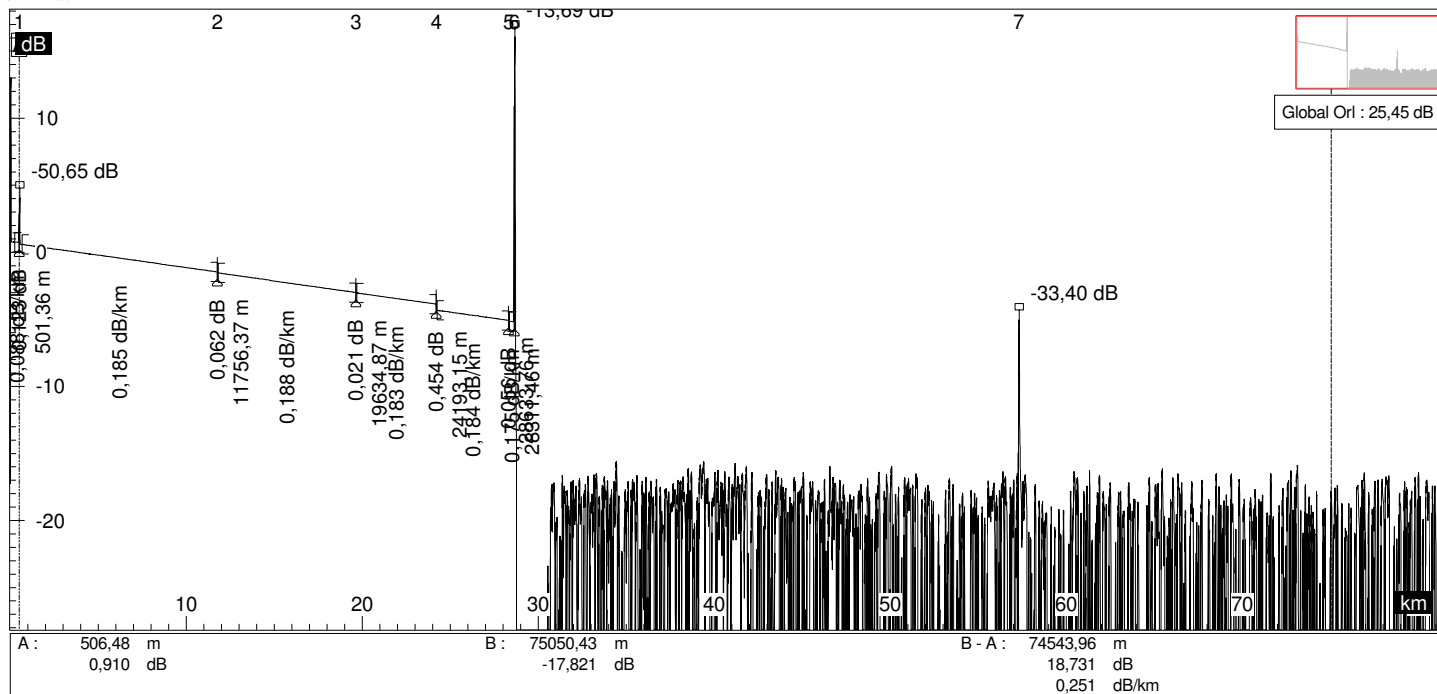

File

File : oiu aj_10.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:22:56 Module : 4126 LM Num. 2963

Table

	Event (7)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,123	-50,65	0,088	501,36			
2		11756,37	0,062		0,185	11255,01	2,086	2,209	
3		19634,87	0,021		0,188	7878,50			
4		24193,15	0,454		0,183	4558,28	2,334	4,605	
5		28311,46	0,056		0,184	4118,31	0,758	5,818	
6		28633,76		-13,69	0,175	322,30	0,057	5,931	
7		57282,87		-33,40		28649,11			