

File

File : oiu aj_2.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:18:57 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2890 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2890 Acq. time : 15s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

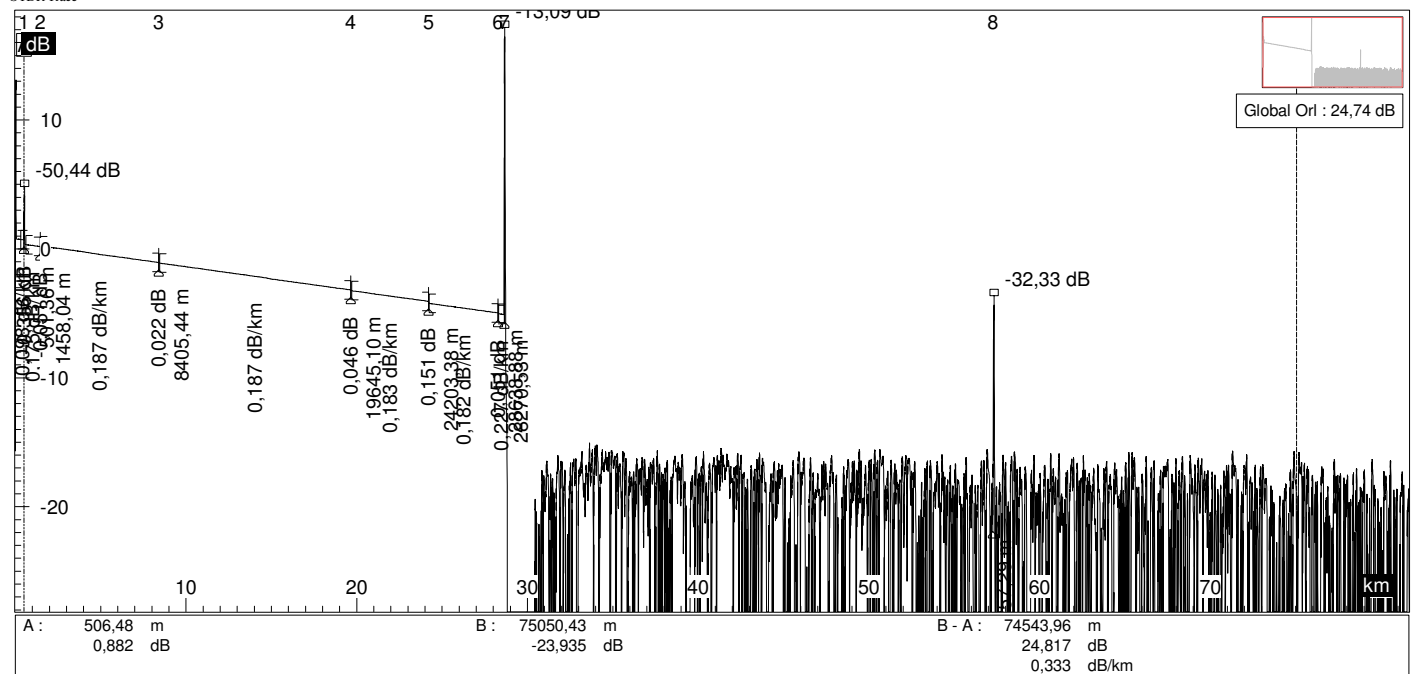

File

File : oiu aj_2.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:18:57 Module : 4126 LM Num. 2963

Table

Event (8)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1 	501,36	0,356	-50,44	0,098	501,36			
2 	1458,04	-0,051		0,175	956,68	0,168	0,523	
3 	8405,44	0,022		0,187	6947,41			
4 	19645,10	0,046		0,187	11239,66			
5 	24203,38	0,151		0,183	4558,28	4,308	4,780	
6 	28270,53	0,051		0,182	4067,15	0,741	5,672	
7 	28638,88		-13,09	0,227	368,35	0,084	5,807	
8 	57257,29		-32,33		28618,41			