

File

File : oiu aj_7.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:21:25 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2895 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2895 Acq. time : 15s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

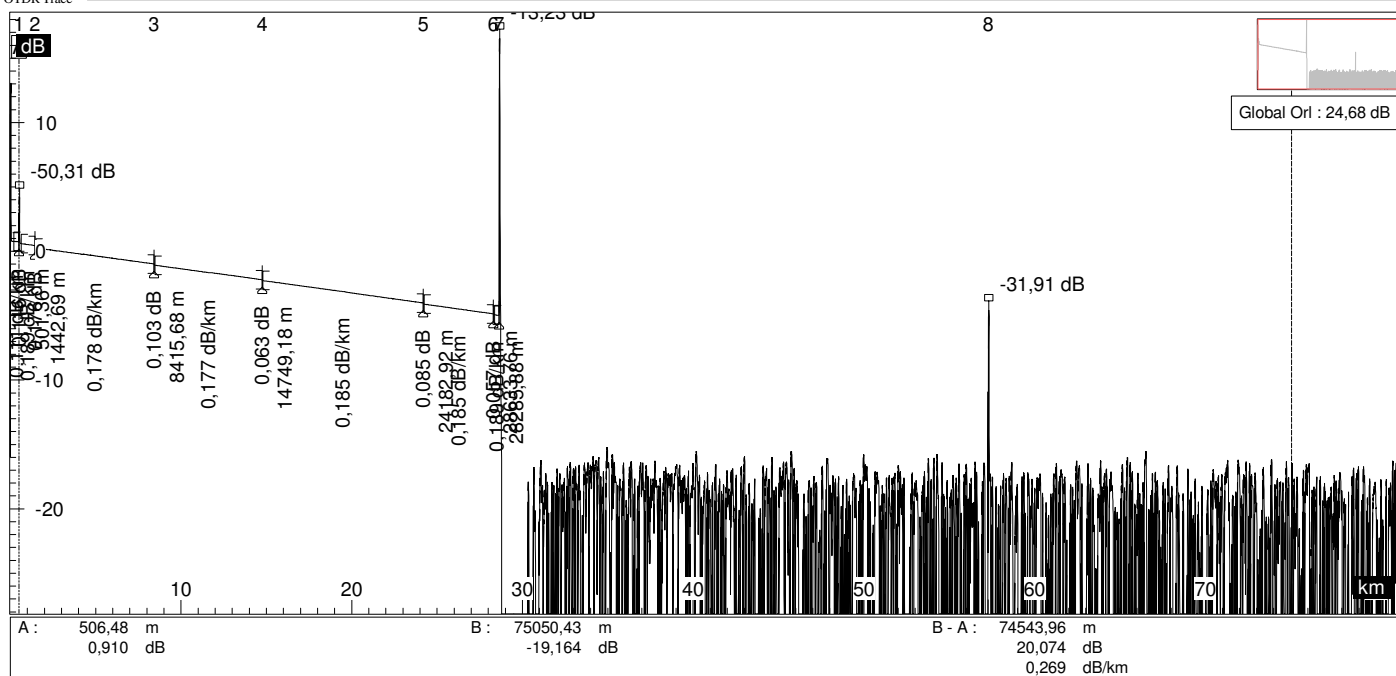

File

File : oiu aj_7.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:21:25 Module : 4126 LM Num. 2963

Table

Event (8)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1 	501,36	0,116	-50,31	0,111	501,36			
2 	1442,69	0,176		0,189	941,33	0,178	0,294	
3 	8415,68	0,103		0,178	6972,99	1,242	1,712	
4 	14749,18	0,063		0,177	6333,50	1,122	2,937	
5 	24182,92	0,085		0,185	9433,74	1,748	4,748	
6 	28285,88	0,057		0,185	4102,96	0,760	5,593	
7 	28633,76		-13,23	0,189	347,88	0,066	5,716	
8 	57272,64		-31,91		28638,88			