

File

File : oiu aj_15.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:33:50 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2908 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2908 Acq. time : 20s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

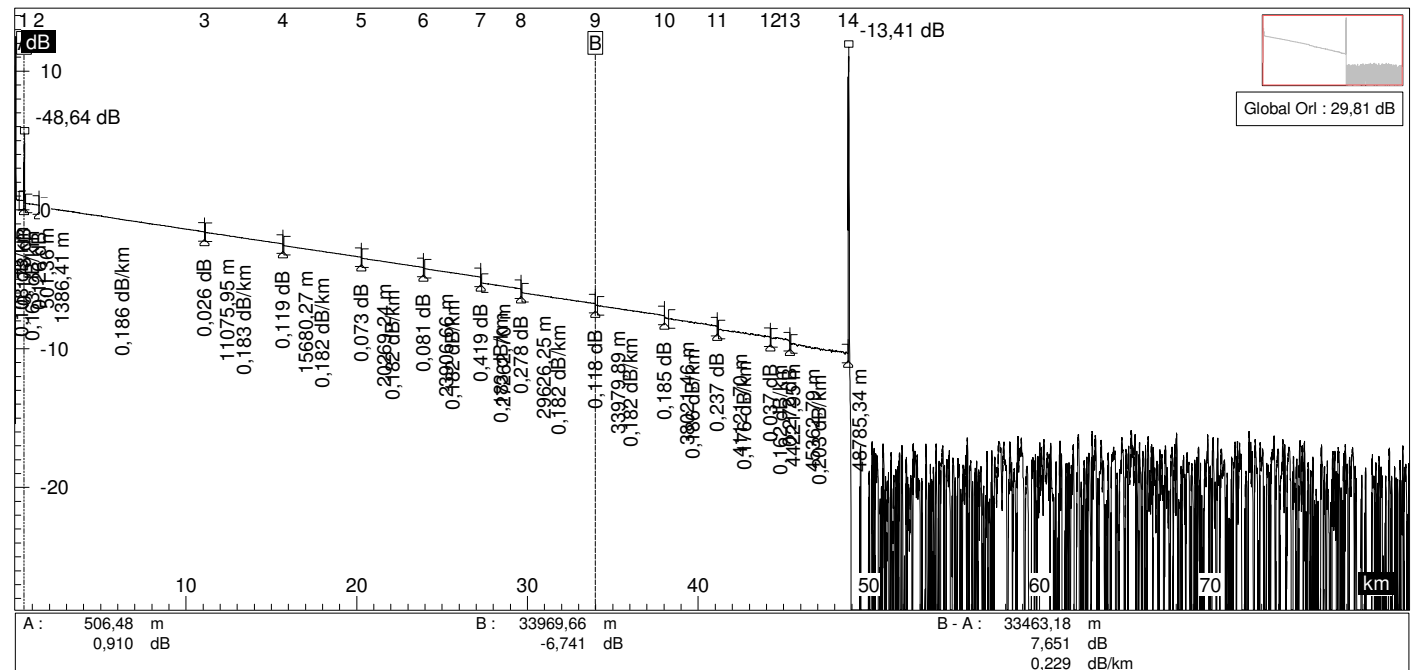

File

File : oiu aj_15.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:33:50 Module : 4126 LM Num. 2963

Table

Event (14)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1 	501,36	0,178	-48,64	0,108	501,36			
2 	1386,41	0,126		0,163	885,05	0,144	0,322	
3 	11075,95	0,026		0,186	9689,54			
4 	15680,27	0,119		0,183	4604,32	2,669	3,118	
5 	20269,24	0,073		0,182	4588,97	0,838	4,074	
6 	23906,66	0,081		0,182	3637,41	0,663	4,811	
7 	27262,70	0,419		0,182	3356,04	0,611	5,503	
8 	29626,25	0,278		0,183	2363,55	0,432	6,354	
9 	33979,89	0,118		0,182	4353,64	0,791	7,423	
10 	38021,46	0,185		0,182	4041,57	0,735	8,275	
11 	41121,70	0,237		0,186	3100,24	0,576	9,037	
12 	44221,95	0,037		0,176	3100,24			
13 	45362,79	0,272		0,162	1140,85	0,766	10,039	
14 	48785,34		-13,41	0,203	3422,55	0,695	11,006	