

File

File : oiu aj_16.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:34:32 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2909 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2909 Acq. time : 20s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

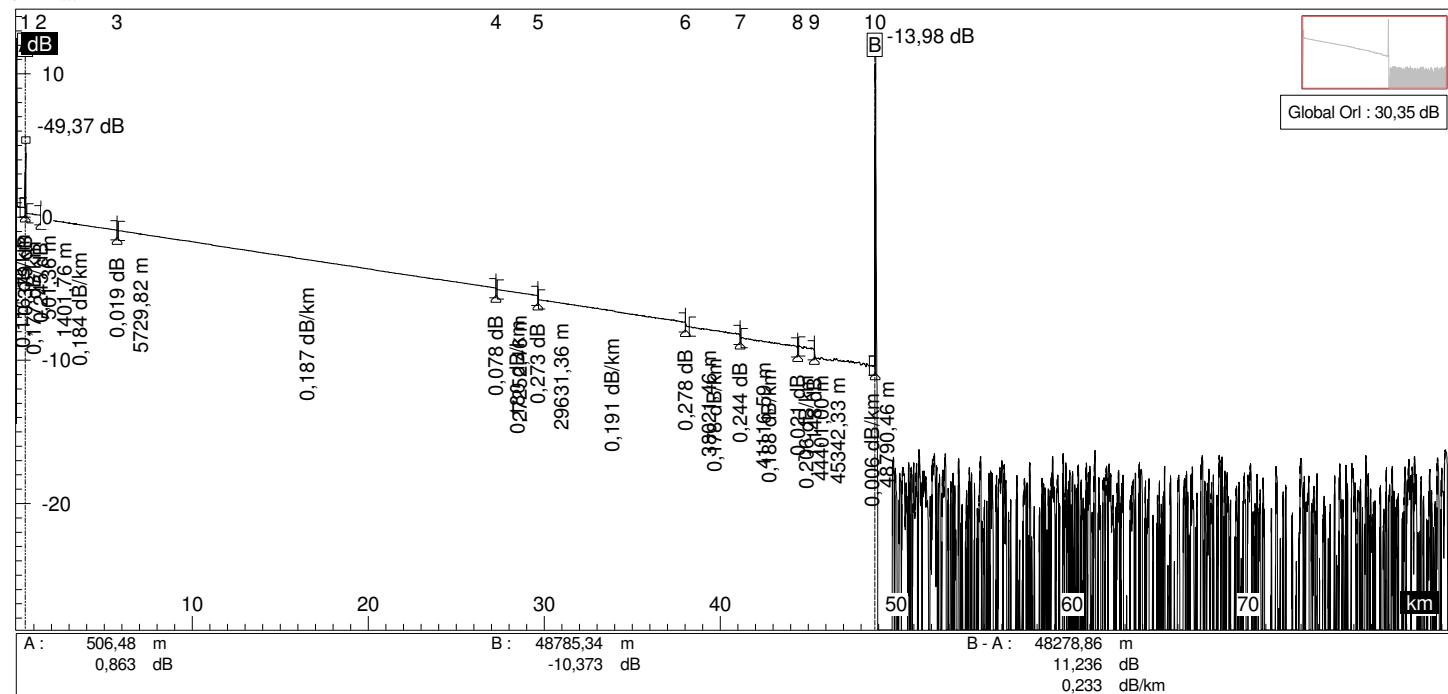

File

File : oiu aj_16.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:34:32 Module : 4126 LM Num. 2963

Table

	Event (10)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,379	-49,37	0,116	501,36			
2		1401,76	0,245		0,177	900,40	0,159	0,538	
3		5729,82	0,019		0,184	4328,06			
4		27252,46	0,078		0,187	21522,64	4,846	5,630	
5		29631,36	0,273		0,180	2378,90	0,428	6,135	
6		38021,46	0,278		0,191	8390,10	1,602	8,011	
7		41116,59	0,244		0,178	3095,13	0,553	8,841	
8		44401,00	-0,021		0,188	3284,42			
9		45342,33	1,148		0,206	941,33	0,791	9,876	
10		48790,46		-13,98	0,006	3448,12	0,021	11,045	