

File

File : oiu_aj_17.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:35:09 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2910 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2910 Acq. time : 20s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

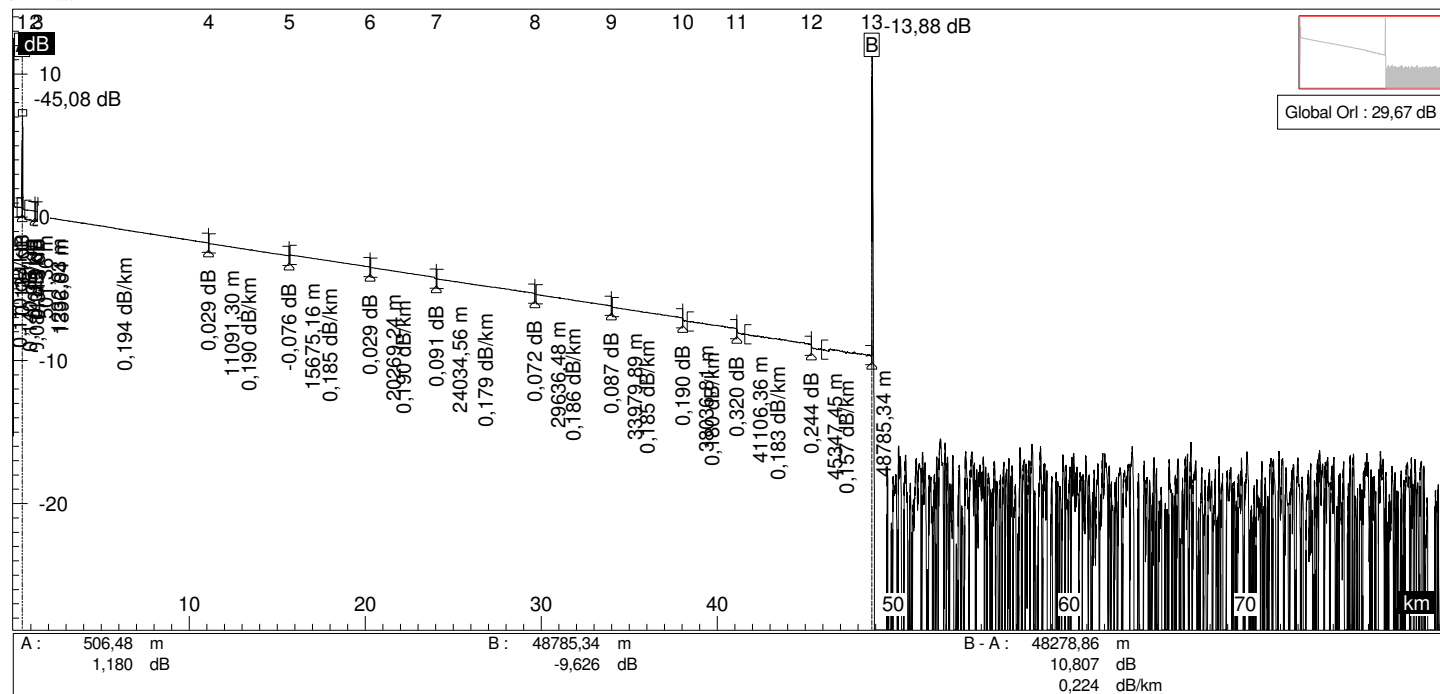

File

File : oiu aj_17.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:35:09 Module : 4126 LM Num. 2963

Table

	Event (13)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,134	-45,08	0,110	501,36			
2		1232,93	0,029		0,140	731,58			
3		1396,64	0,315		0,084	163,71	0,144	0,278	
4		11091,30	0,029		0,194	9694,65			
5		15675,16	-0,076		0,190	4583,86	2,780	3,372	
6		20269,24	0,029		0,185	4594,09			
7		24034,56	0,091		0,190	3765,31	1,592	4,887	
8		29636,48	0,072		0,179	5601,92	1,005	5,984	
9		33979,89	0,087		0,186	4343,41	0,808	6,864	
10		38036,81	0,190		0,185	4056,92	0,750	7,701	
11		41106,36	0,320		0,180	3069,55	0,554	8,444	
12		45347,45	0,244		0,183	4241,09	0,778	9,542	
13		48785,34		-13,88	0,157	3437,89	0,539	10,326	