


```
File :          oiu aj_23.sor          Device :          MTS 4000 Num. 3646
Date :          7.11.2012 17:38:32     Module :          4126 LM Num. 2963
```

Operator :	Direction :	O-->E	Backscatter coeff.: -81,00 dB
ORIGIN	Origin :		
Cable :	End :		
Fiber :	2916	Wavelength (nm) :	1550
Color :		Index :	1,465000
END		Pulse (ns) :	300
Cable :		Range (km) :	81,855
Fiber :	2916	Acq. time :	20s
Color :		Resolution :	5.00 m

Comment :

OTDR Trace

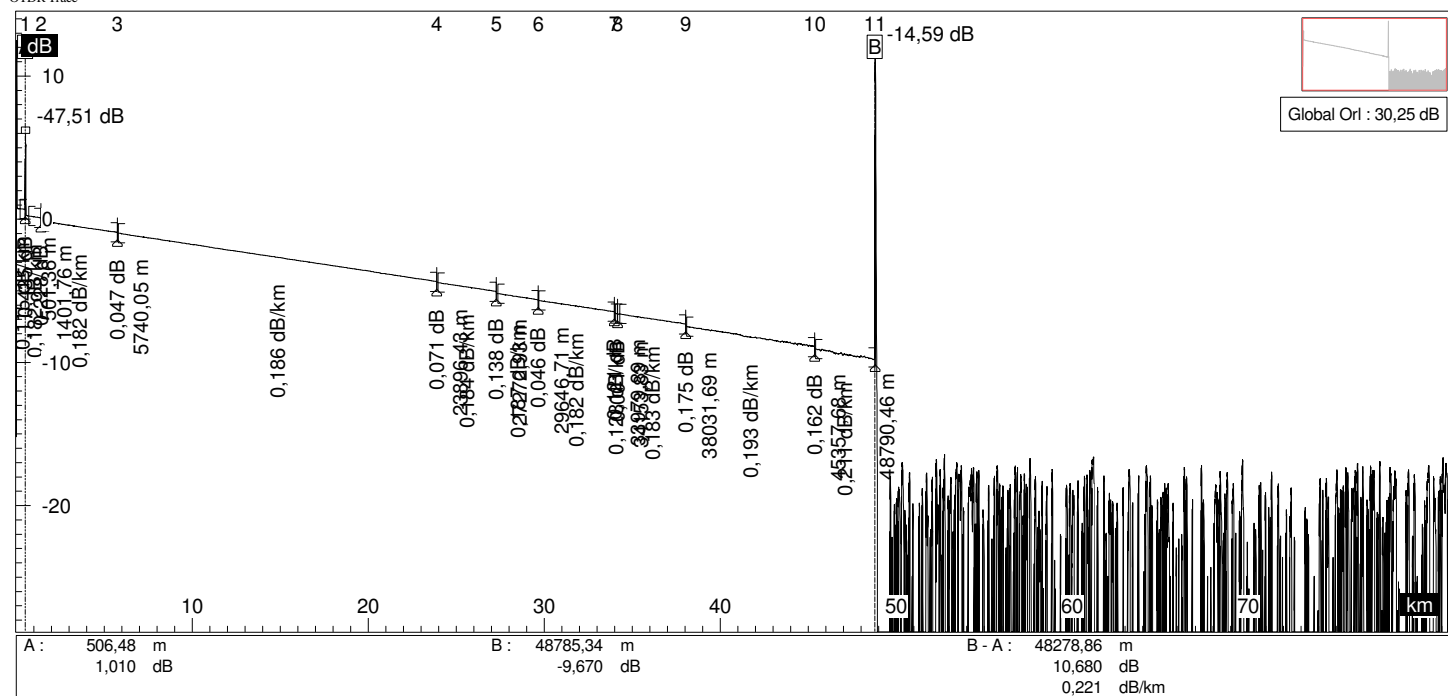

File

File : oiu aj_23.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:38:32 Module : 4126 LM Num. 2963

Table

	Event (11)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1		501,36	0,435	-47,51	0,115	501,36			
2		1401,76	0,228		0,182	900,40	0,163	0,598	
3		5740,05	0,047		0,182	4338,29			
4		23896,43	0,071		0,186	18156,37	4,219	5,045	
5		27272,93	0,138		0,184	3376,50	0,622	5,737	
6		29646,71	0,046		0,187	2373,78			
7		33979,89	0,121		0,182	4333,18	1,280	7,155	
8		34153,83	0,001		0,128	173,94			
9		38031,69	0,175		0,183	3877,86	0,732	8,008	
10		45357,68	0,162		0,193	7325,99	1,413	9,595	
11		48790,46		-14,59	0,211	3432,78	0,725	10,482	