

File

File : oiu aj_24.sor Device : MTS 4000 Num. 3646
Date : 7.11.2012 17:39:09 Module : 4126 LM Num. 2963

Configuration


Operator : Direction : O-->E Backscatter coeff.: -81,00 dB
ORIGIN Origin :
Cable : End :
Fiber : 2917 Wavelength (nm) : 1550
Color : Index : 1,465000
END Pulse (ns) : 300
Cable : Range (km) : 81,855
Fiber : 2917 Acq. time : 20s
Color : Resolution : 5,00 m

Comment

Comment :

Job

OTDR Trace

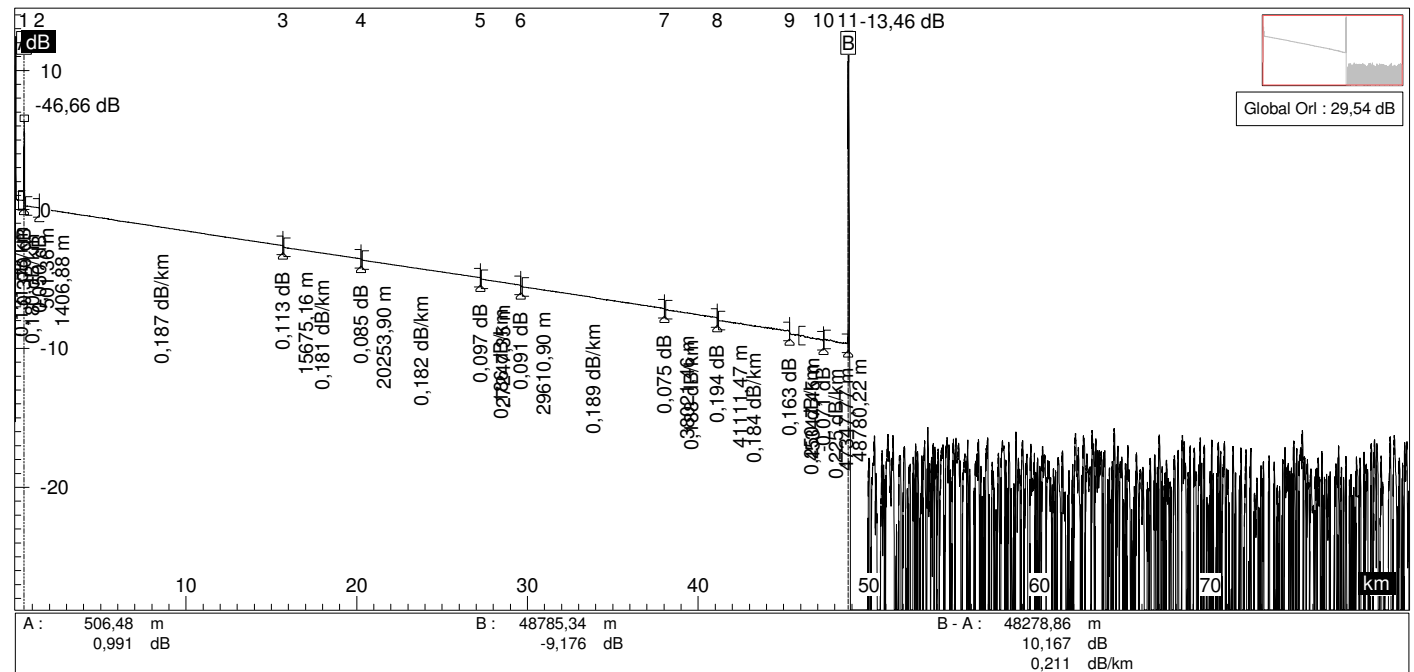

File

File : oiu aj_24.sor Device : MTS 4000 Num. 3646
 Date : 7.11.2012 17:39:09 Module : 4126 LM Num. 2963

Table

Event (11)	Distance (m)	Loss (dB)	Reflectance (dB)	Slope (dB/km)	Rel. Dist. (m)	Section loss (dB)	Total loss (OTDR) (dB)	Uncertainty
1	501,36	0,370	-46,66	0,131	501,36			
2	1406,88	0,050		0,180	905,52			
3	15675,16	0,113		0,187	14268,28	2,885	3,256	
4	20253,90	0,085		0,181	4578,74	0,830	4,199	
5	27247,35	0,097		0,182	6993,45	1,271	5,556	
6	29610,90	0,091		0,186	2363,55	0,441	6,094	
7	38021,46	0,075		0,189	8410,56	1,589	7,774	
8	41111,47	0,194		0,188	3090,01	0,581	8,430	
9	45347,45	0,163		0,184	4235,98	0,779	9,403	
10	47347,77	-0,071		0,250	2000,32	0,500	10,066	
11	48780,22		-13,46	0,225	1432,46	0,323	10,319	